

IntesisHome®

Installation Sheet

IHWFIMHI001R000



Intesis Software SLU

© 2019 Intesis Software SLU All rights reserved.

This document has been carefully written by Intesis Software SLU and a lot of effort has been made to ensure no errors or mistakes are present in the document. Intesis Software SLU is not responsible for printing or clerical errors.

Information in this document is subject to change without notice. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Intesis Software SLU

Intesis Software SLU
Milà i Fontanals, 1 bis
08700 Igualada
Spain

IntesisHome® is a trademark of Intesis Software SLU. Third party product names or company names used in this document may be trademarks of their respective companies. Its use in this document is purely for information purposes only.

Table of contents

1 Safety instructions3

2 Device information3

3 Device connection3

4 External powering scheme4

5 Switch configuration4

1 Safety instructions


WARNING

Follow carefully this safety and installation instructions. Improper work may lead to serious harmful for your health and may damage seriously the interface and/or the AC indoor unit.

- This interface must be installed by accredited technical personnel (electrician, installer or authorized technical personnel) and following all the safety instructions.
- This interface must only be installed in a restricted access location.
- Before manipulating the AC indoor unit be sure it is completely disconnected from Mains power.
- In case of installation of the interface inside the AC indoor unit, fix the interface and communication cables preferably to any appropriate point of the plastic cover of the unit taking care of no blocking free movement of mobile parts and as far as possible from tubes containing liquids and power cables.


2 Device information

- A. Lid
- B. LED indicator
- C. Push button
- D. AC connector
- E. External Power Supply Connector
- F. DIP-Switch

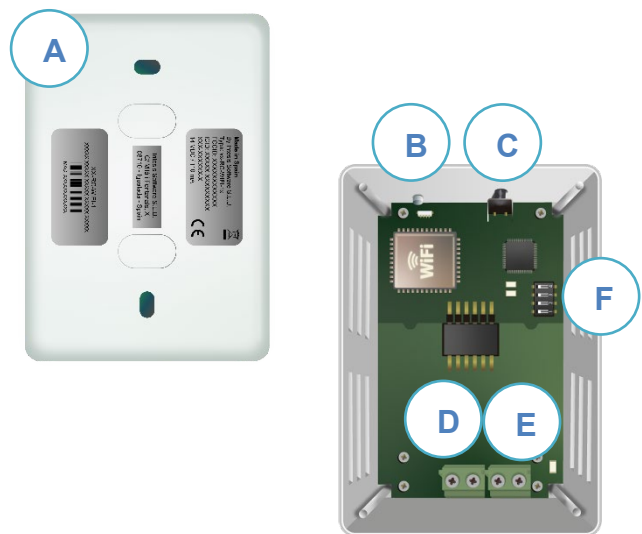


3 Device connection

- Unplug the Air Conditioner (AC) unit from mains.
- Access to the main Printed Circuit Board.
- Locate the X/Y socket connector.
- Select a location for the device.
- Connect the IntesisHome device to the Air Conditioner.
- Close the Air Conditioner unit.
- Plug the AC to the power supply line.

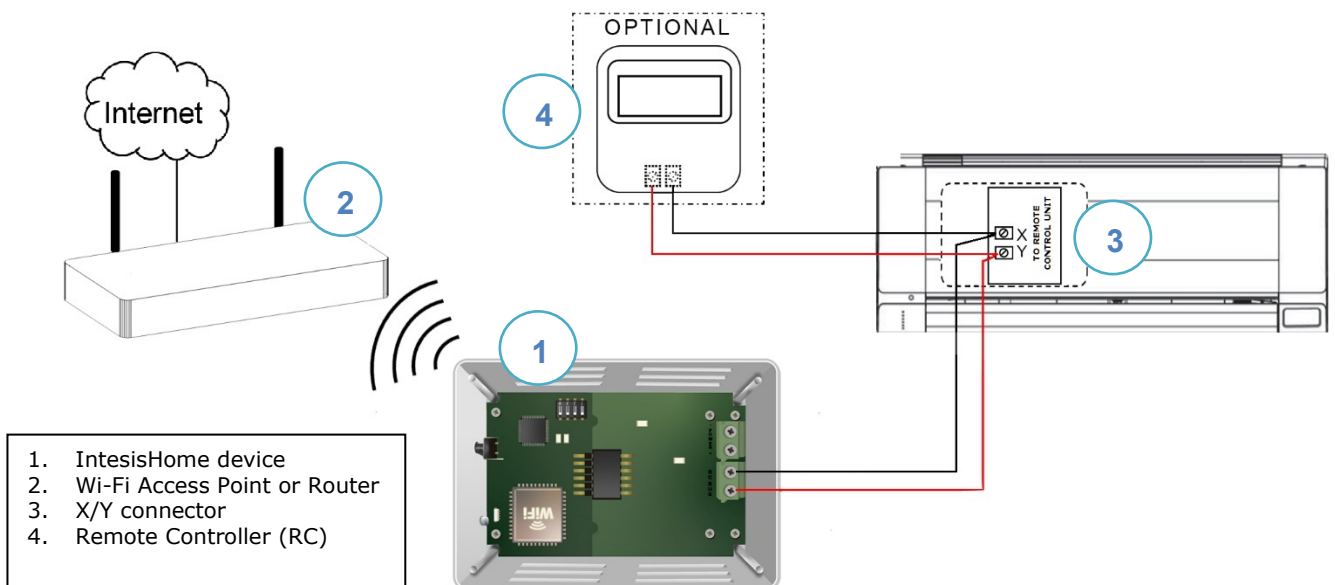

4 External powering scheme

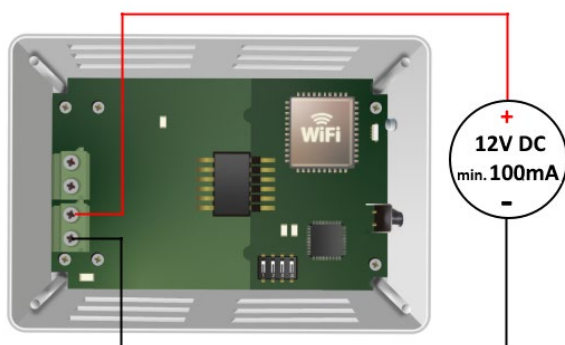

Important: If a wired remote controller of the AC manufacturer is connected in the same bus, communication may shut down. In case it happens, use an external power supply connected to the PS connector in our device to overcome this situation.

Connect a NEC Class 2 or Limited Power Source (LPS) and SELV rated power supply to the device, respect the polarity. Apply always a voltage within the range admitted and of enough power (12V DC, min. 100 mA).

5 Switch configuration



Please, make sure that switches are placed in the right position as per your desired settings.

Switches 1 2 3 4	Description
0 X X X	Slave - A MHI Controller must be present in the X Y bus configured as Master (Default value)
1 X X X	Master – MHI Controller not needed in X Y bus. If it exists, it must be configured as Slave
X 0 X X	Temperature in Celsius (in the RC bus) (Default Value)
X 1 X X	Temperature in Fahrenheit (in the RC bus)
X X 0 X	Low Power Mode
X X 1 X	High Performance Mode (Default value)
X X X 0	WIFI power is limited
X X X 1	Max WIFI power (Default value)

Switch 3

This switch determines the performance of the device. Running in High Performance Mode means maximum consumption and maximum device performance.

Switch 4

This switch determines the Wi-Fi range of the device. Maximum range is set by default. Consider that changing this switch may affect to device Wi-Fi communication, happening a device in a running installation not to reach the current access point or Wi-Fi network to which is connected.

In case no external supply is used: In very specific installations, AC port consumption may be overpassed, leading the device to reboot. If that happened, decrease device consumption by using SW3 and SW4.

NOTE: Remember that you need to power cycle the climate system or the IntesisHome device for the changes in the switches to be applied.